

OUTLINE DRAWING

FSS-40-XX-U-I

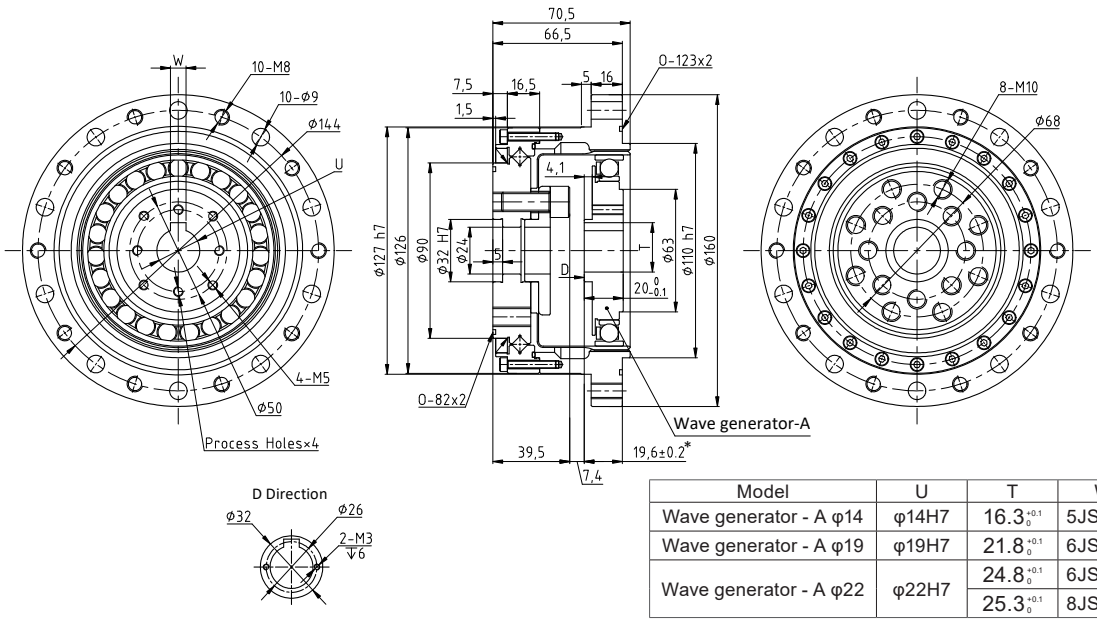

Model	U	T	W
Wave generator - A φ14	φ14H7	16.3 +0.1 0	5JS9/P9
Wave generator - A φ19	φ19H7	21.8 +0.1 0	6JS9/P9
Wave generator - A φ22	φ22H7	24.8 +0.1 0	6JS9/P9
		25.3 +0.1 0	8JS9/P9

FSF-14-XX-U-I

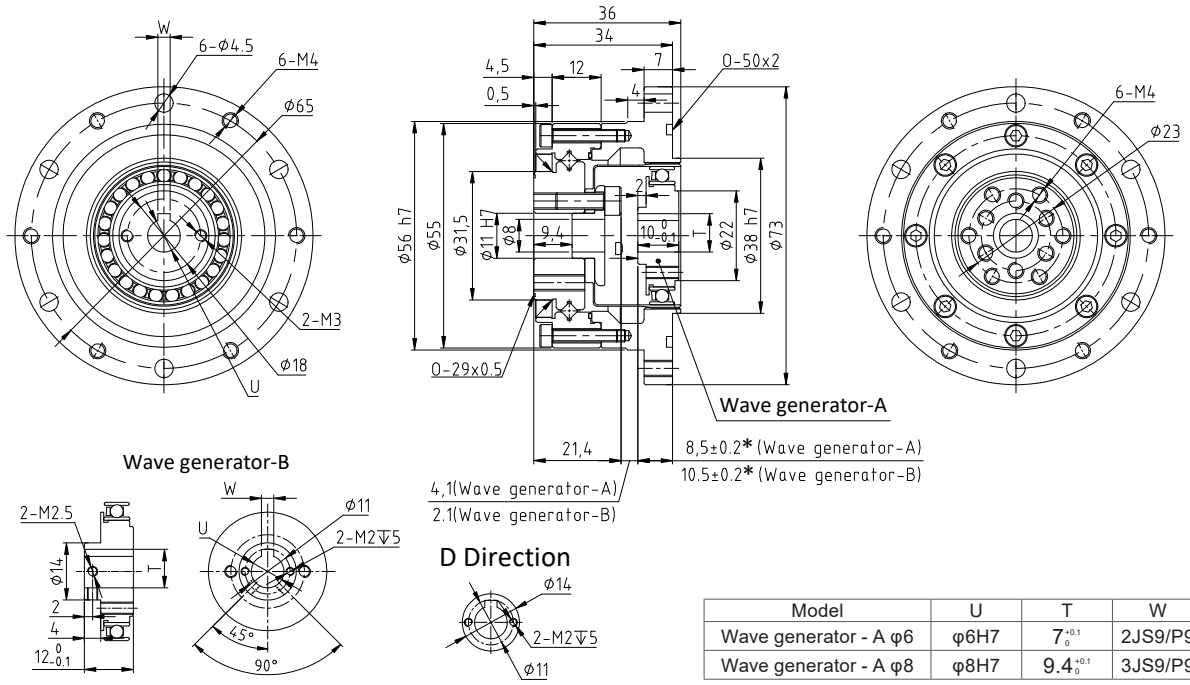

Model	U	T	W
Wave generator - A φ6	φ6H7	7 +0.1 0	2JS9/P9
Wave generator - A φ8	φ8H7	9.4 +0.1 0	3JS9/P9

Model	Reduction ratio	Rated torque at input 2000r/min		Permissible peak torque at start/stop		Permissible max. value of ave.load torque		Instantaneous permissible max. torque		Permissible max. input rotational speed	Permissible ave. input rotational speed	Backlash	Weight	Design life
		N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	N·m	Kgf·m	r/min	r/min	Arc Sec	kg	Hour
40	50	137	14	402	41	196	20	686	70	4000	3000	≤20	4.6	10000
	80	206	21	519	53	284	29	980	100					15000
	100	265	27	568	58	372	38	1080	110					15000
	120	294	30	617	63	451	46	1180	120					15000
	160	294	30	647	66	451	46	1180	120					15000
14	50	5.4	0.55	18	18	6.9	0.7	35	3.6	8500	3500	≤20	0.25	10000
	80	7.8	0.8	23	2.4	11	1.1	47	4.8					15000
	100	7.8	0.8	28	2.9	11	1.1	54	5.5					15000